

Power Divider 2 way


Features

- Flat Frequency Response.
- Frequency Range:0.5-18GHz
Multi-Octave Bandwidths.
- Temperature Range:-54 to +125 c
Meets MIL-E-5400 Environments
- 2 Watt rating



Application

- Test equipments
- Broadband assemblies
- For system building

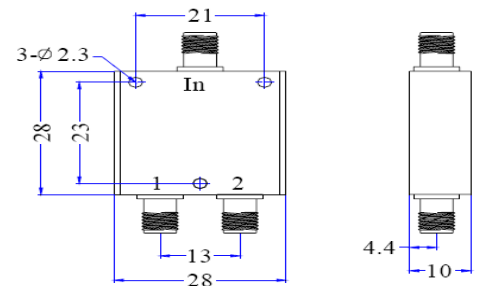

Detail

P/No	Frequency Range	I.L (dB) Max.	Input VSWR Max.	Output VSWR Max.	Isolation (dB) Min.	Power (W)		Amplitude Unbalance Max.	Phase Unbalance Max.
						Forward	Reverse		
Two Way Broadband Power Divider									
DIV-SMA02T009	1-8GHz	1.2dB	1.35	1.39	18	20	3	0.3dB	6
DIV-SMA02T004	2-18GHz	1.2dB	1.50	1.50	16	20	3	0.4dB	5
DIV-SMA02T010	0.5-2.4GHz	0.4dB	1.25	1.20	22	20	3	0.3dB	2
DIV-SMA02T008	0.8-2.4GHz	0.4dB	1.30	1.20	22	20	3	0.2dB	2
DIV-SMA02T005	1-4GHz	0.4dB	1.25	1.20	20	20	2	0.3dB	2
DIV-SMA02T001	2-8GHz	0.6dB	1.25	1.20	18	20	3	0.3dB	3
DIV-SMA02T011	4-18GHz	0.8dB	1.50	1.5	18	10	2	0.4dB	5
DIV-SMA02T003	1-2GHz	0.3dB	1.20	1.15	22	20	3	0.2dB	2
DIV-SMA02T012	2-4GHz	0.3dB	1.25	1.20	22	20	3	0.2dB	2
DIV-SMA02T013	4-8GHz	0.45dB	1.25	1.20	20	20	3	0.2dB	3
DIV-SMA02T014	6-18GHz	0.7dB	1.50	1.50	18	10	2	0.4dB	5

For more technical information, please contact us by:
TEL: +886-2-26947700 FAX: +886-2-26949821 Email: sales@vicommtech.com

Power Divider 4 way

Features


- Flat Frequency Response.
- Frequency Range:0.5-18GHz
Multi-Octave Bandwidths.
- Temperature Range:-54 to +125 c
Meets MIL-E-5400 Environments
- 2 Watt rating



Application

- Test equipments
- Broadband assemblies
- For system building

Detail

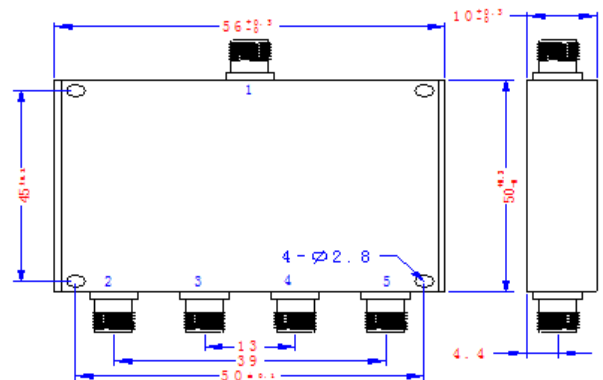

P/No	Frequency Range	I.L (dB) Max.	Input VSWR Max.	Output VSWR Max.	Isolation (dB) Min.	Power (W)		Amplitude Unbalance Max.	Phase Unbalance Max.
						Forward	Reverse		
Two Way Broadband Power Divider									
DIV-SMA04T005	1-8GHz	2.0dB	1.50	1.40	15	20	3	0.4dB	10
DIV-SMA04T003	2-18GHz	2.2dB	1.65	1.60	15	20	2	0.6dB	10
DIV-SMA04T006	0.5-2GHz	0.8dB	1.25	1.20	20	20	3	0.3dB	6
DIV-SMA04T007	0.8-2.4GHz	0.7dB	1.25	1.20	20	20	3	0.3dB	6
DIV-SMA04T002	1-4GHz	0.7dB	1.25	1.20	20	20	3	0.3dB	4
DIV-SMA04T001	2-8GHz	1.0dB	1.30	1.25	18	20	3	0.3dB	8
DIV-SMA04T008	4-18GHz	1.6dB	1.60	1.50	18	10	2	0.5dB	8
DIV-SMA04T009	1-2GHz	0.4dB	1.20	1.20	22	20	3	0.3dB	3
DIV-SMA04T010	2-4GHz	0.4dB	1.25	1.20	22	20	3	0.3dB	3
DIV-SMA04T011	4-8GHz	0.6dB	1.30	1.25	18	20	3	0.3dB	3
DIV-SMA04T012	6-18GHz	1.3dB	1.60	1.60	18	20	2	0.510dB	8

For more technical information, please contact us by:

TEL: +886-2-26947700 FAX: +886-2-26949821 Email: sales@vicommtech.com

Power Divider 8 way


Features

- Flat Frequency Response.
- Frequency Range:0.5-18GHz
Multi-Octave Bandwidths.
- Temperature Range:-54 to +125 c
Meets MIL-E-5400 Environments
- 2 Watt rating



Application

- Test equipments
- Broadband assemblies
- For system building

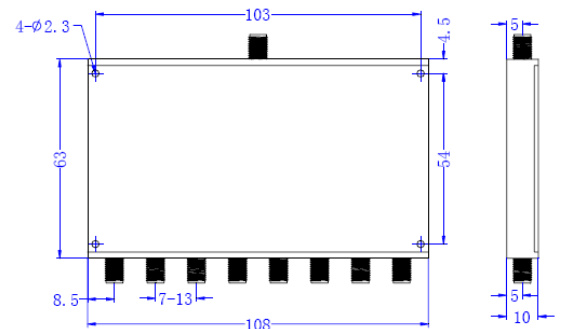

Detail

P/No	Frequency Range	I.L (dB) Max.	Input VSWR Max.	Output VSWR Max.	Isolation (dB) Min.	Power (W)		Amplitude Unbalance Max.	Phase Unbalance Max.
						Forward	Reverse		
Two Way Broadband Power Divider									
DIV-SMA08T004	0.5-2GHz	1.4dB	1.40	1.25	20	20	3	0.5dB	12
DIV-SMA08T003	0.8-2.4GHz	1.0dB	1.40	1.25	20	20	3	0.5dB	8
DIV-SMA08T001	1-4GHz	1.2dB	1.35	1.30	20	20	3	0.5dB	10
DIV-SMA08T002	2-8GHz	1.6dB	1.70	1.60	18	20	3	0.5dB	12
DIV-SMA08T005	4-18GHz	1.20dB	1.70	1.60	18	10	2	0.8dB	12
DIV-SMA08T006	1-2GHz	0.80dB	1.25	1.20	20	20	3	0.4dB	5
DIV-SMA08T007	2-4GHz	0.80dB	1.25	1.20	20	20	3	0.4dB	5
DIV-SMA08T008	4-8GHz	1.4dB	1.50	1.25	18	20	2	0.6dB	10
DIV-SMA08T009	6-18GHz	2.20dB	1.80	1.80	18	10	2	0.6dB	12

For more technical information, please contact us by:
 TEL: +886-2-26947700 FAX: +886-2-26949821 Email: sales@vicommtech.com