

SHB-404024 Pneumatic Press Shielding Box

Application

- Excellent electromagnetic shielding and solder float (Excluding Filter connections).
- It's widely used for Bluetooth, GSM, WCDMA, RFID, WLAN, Motorcycle and Mobile, and wireless shielding box system etc.
- Easy to setup and installation, wireless solution.
- In operational application range, several portable test station workable, and don't need any wire connection. The source signal from satellite, don't need to buy any simulations. Low cost for mass production application.



Features

- Dimension : 400 x 400 x 240mm
- High RF Shielding
- Weight: 34 kg
- Pneumatic control for semi-automatic operation.
- Pneumatic operation
- Additional filters


Specification

Shielding effective	>80dB	Power	AC110~240V
Frequency	0.5~6GHz	SMA connector	SMA*4
Absorber effective	27dB/ 3.5mm thickness	Fixture air connector	4mm OD hose
Outline dimension(WDH)	535 x 480 x 352mm	Box air connector	6mm OD hose
Inner dimension(WDH)	400 x 400 x 240mm	Structure	Aluminum base
Box color	white		

For more technical information, please contact us by:
TEL: +886-2-26947700 FAX: +886-2-26949821 Email: sales@vicommtech.com

Test Fixture for shielding box

Customized pneumatic test fixture is available.

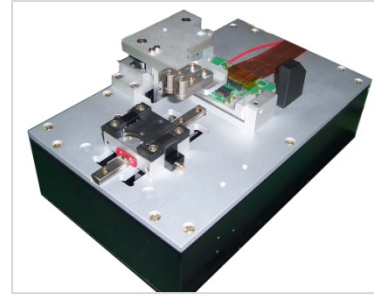

Optional accessory

- Card Bus Reader
- Card Bus to Mini PCI Adapter
- Card Bus to PCI Adapter
- Card Bus to Card Bus Adapter
- PCIe mini extend card