

# SHB-404030 Pneumatic Press Shielding Box

## Application

- Excellent electromagnetic shielding and solder float (Excluding Filter connections).
- It's widely used for Bluetooth, GSM, WCDMA, RFID, WLAN, Motorcycle and Mobile, and wireless shielding box system etc.
- Easy to setup and installation, wireless solution.
- In operational application range, several portable test station workable, and don't need any wire connection. The source signal from satellite, don't need to buy any simulations. Low cost for mass production application.



## Features

- Dimension : 400 x 400 x 300mm
- High RF Shielding
- Weight: 26 kg
- Pneumatic operation
- Pneumatic control for semi-automatic operation.
- Additional filters


## Specification

<b>Shielding effective</b>	>80dB	<b>Power</b>	AC110~240V
<b>Frequency</b>	0.5~6GHz	<b>SMA connector</b>	SMA*6
<b>Absorber effective</b>	27dB/ 3.5mm thickness	<b>Fixture air connector</b>	4mm OD hose
<b>Outline dimension(WDH)</b>	505 x 504 x 319mm	<b>Box air connector</b>	6mm OD hose
<b>Inner dimension(WDH)</b>	400 x 400 x 300mm	<b>Structure</b>	Stainless steel
<b>Box color</b>	white		

For more technical information, please contact us by:  
TEL: +886-2-26947700 FAX: +886-2-26949821 Email: sales@vicommtech.com

## Test Fixture for shielding box

Customized pneumatic test fixture is available.

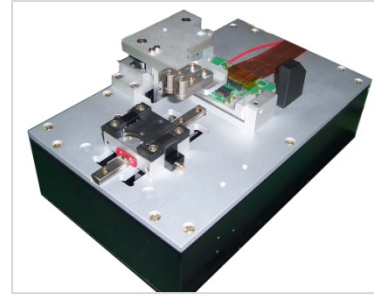

## Optional accessory

- Card Bus Reader
- Card Bus to Mini PCI Adapter
- Card Bus to PCI Adapter
- Card Bus to Card Bus Adapter
- PCIe mini extend card